


PIASINI

engineering

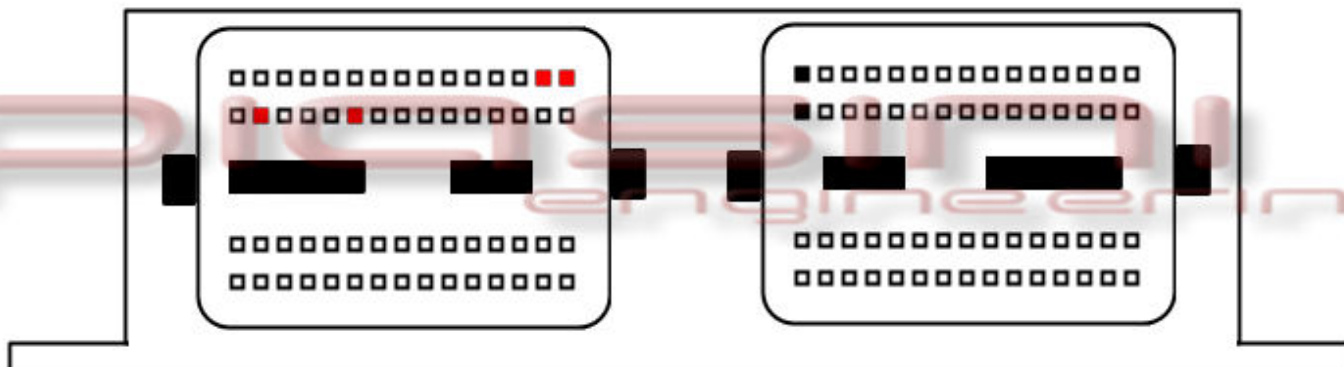

Connect as below:


Serial Suite:

Red
Black

to
to

ECU Plug:



4 Pins Red (Power Supply +12 Volt)
2 Pins Black (Ground)

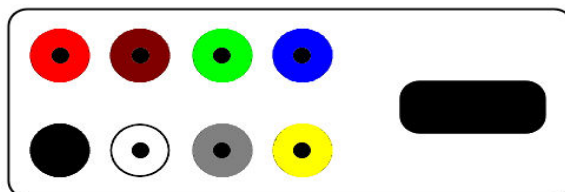

Where to connect the flat cable:




READ the ECU:

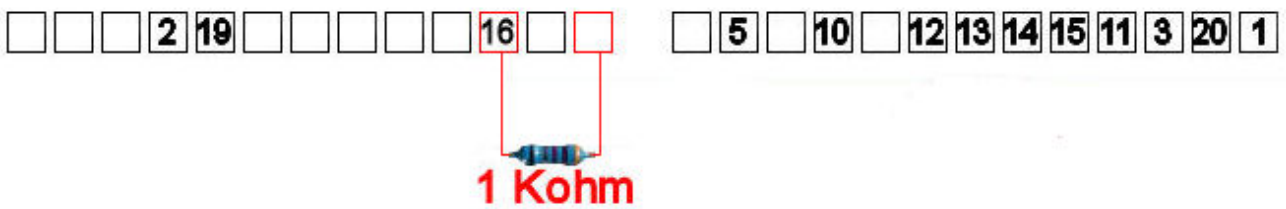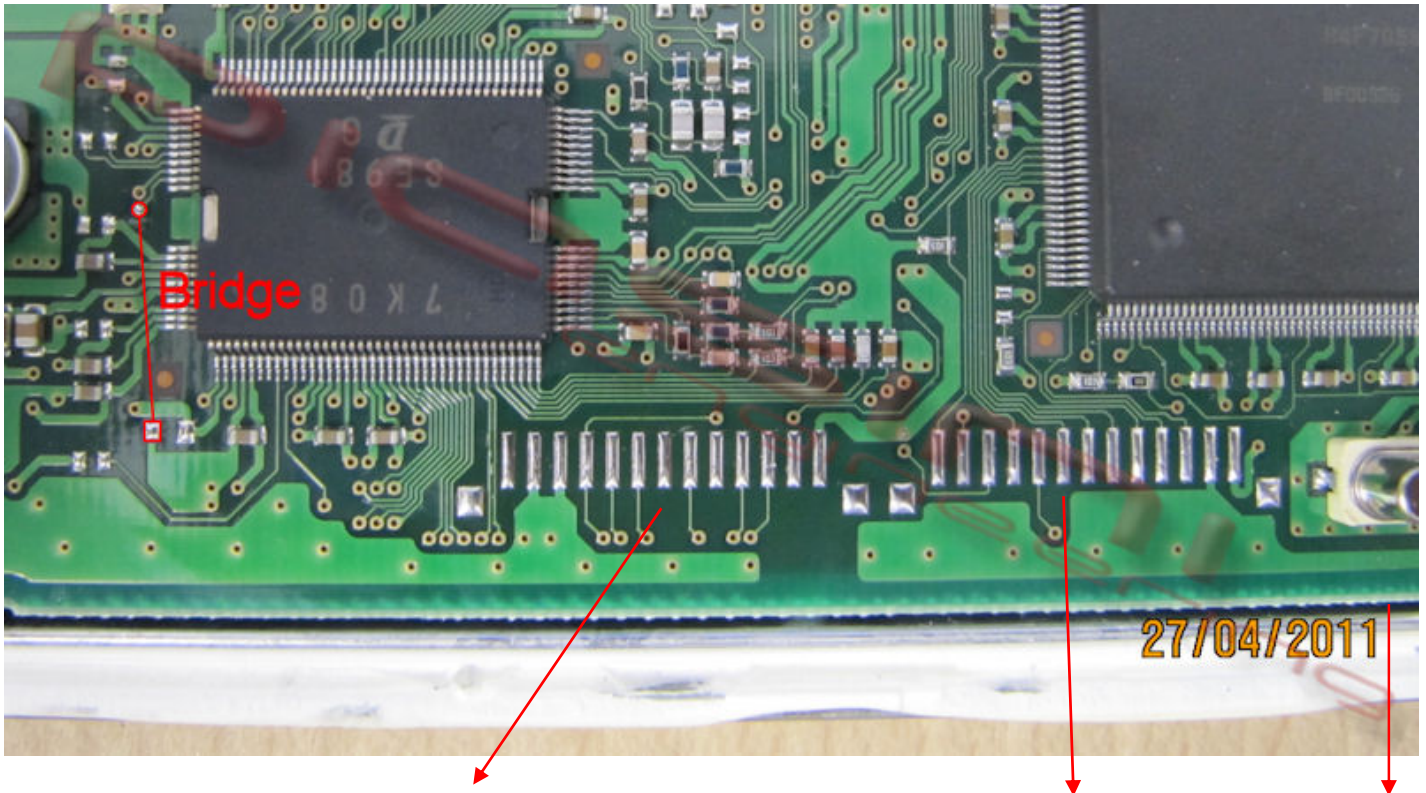

1. Connect the flat cable pin following the number like in picture;
2. Put a **RESISTOR** (1KOhm) like in the picture;
3. Put a wire (**bridge**) like in the picture



WRITE the ECU:

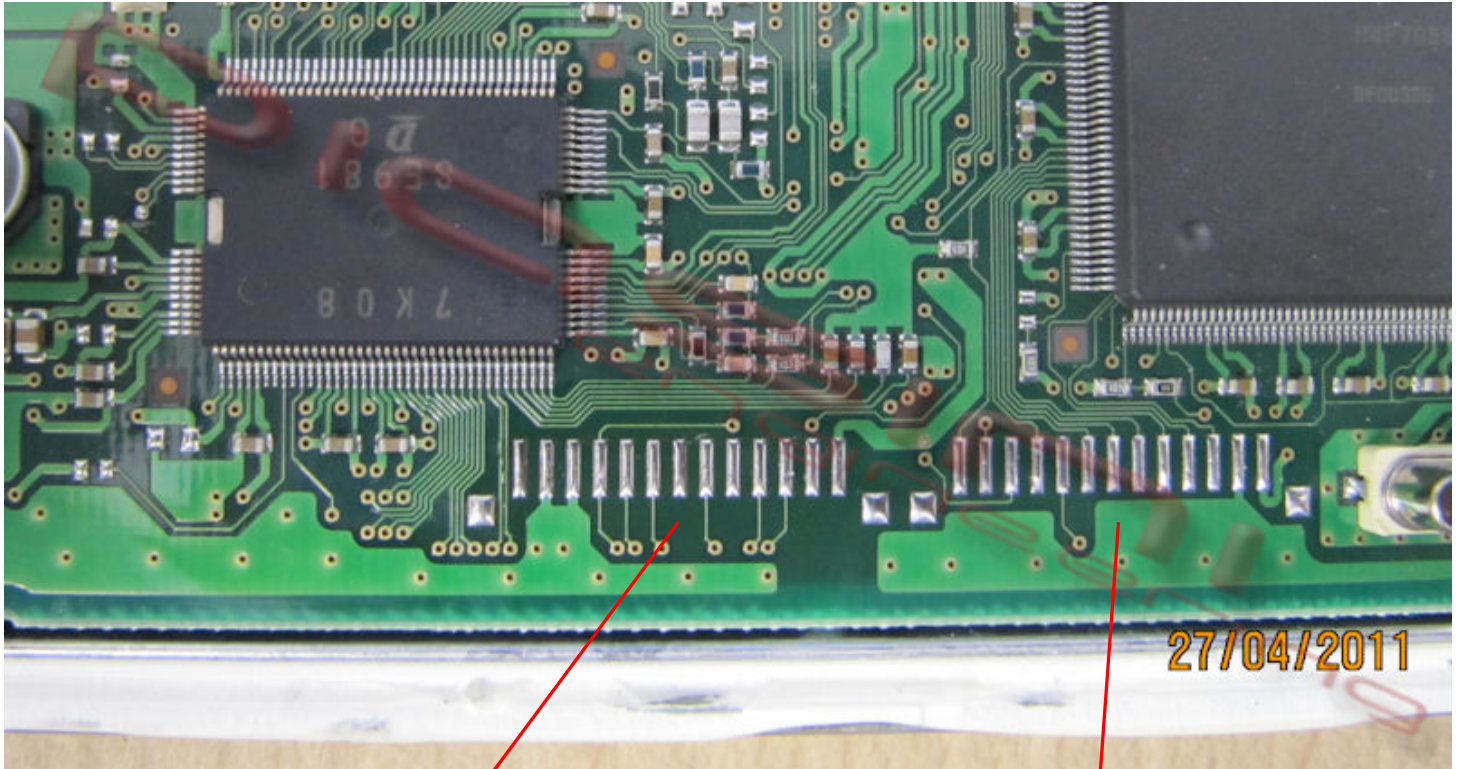

You have to **remove the bridge used before**, and put another 2 wire **Bridge** like in the picture.

