

ENGINE GENERAL**0000-00****GENERAL INFORMATION****1. SPECIFICATIONS**

Category	Specifications	Remarks
Engine model	G16DF MPI	
Engine type / Number of cylinders	In-line 4 cylinders	
Displacement (cc)	1,597	
Compression ratio	10.5	
Max. power (PS)	128	
Max. torque (Nm)	160	
Cylinder block	Integrated with bed plate (Aluminum casting)	
Valve system	DOHC 16-valve / Dual CVVT	
Timing chain	Silent chain with 6.35 mm pitch	
Intake manifold	VIS intake manifold	
Exhaust manifold	Integrated with MCC	
Crankshaft	8 mm offset (Crankshaft offset from piston)	
Cooling system	Inlet control (Thermostat)	
Lubrication system	With VOP	
Engine oil capacity	4.0 l	
Coolant capacity	6.5 l	
Fuel tank capacity	47 l	

ENGINE
GENERALENGINE
ASSEMBLFUEL
SYSTEMIGNITI
ON
SYSTEMINTAKE
SYSTEMEXHAUST
SYSTEMLUBRICA
TIONCOOLIN
G SYSTEMCHARGIN
GSTARTIN
GCRUISE
CONTROENGINE
CONTRO

EEM

Modification basis	
Application basis	
Affected VIN	


2. APPEARANCE

Front view**Rear view****Right view****Left view**


Modification basis	
Application basis	
Affected VIN	

3. MAJOR COMPONENTS

► Front view

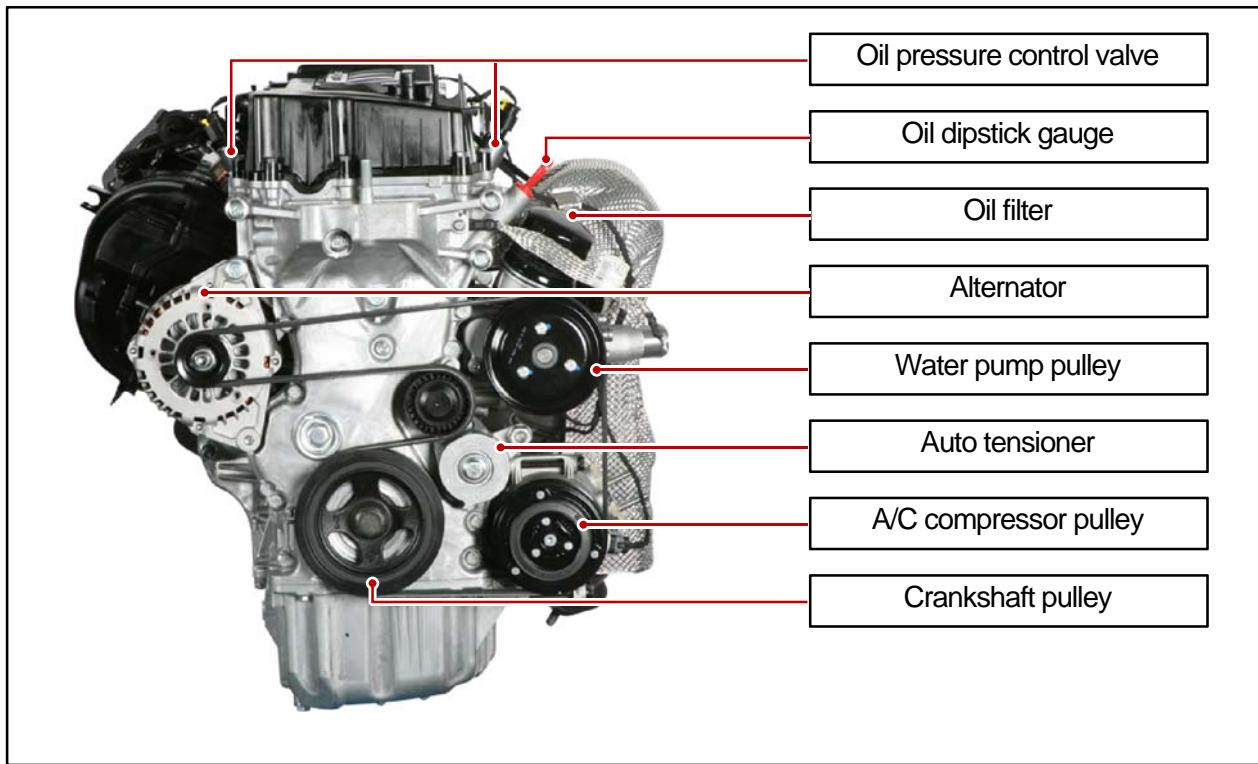


► Rear view

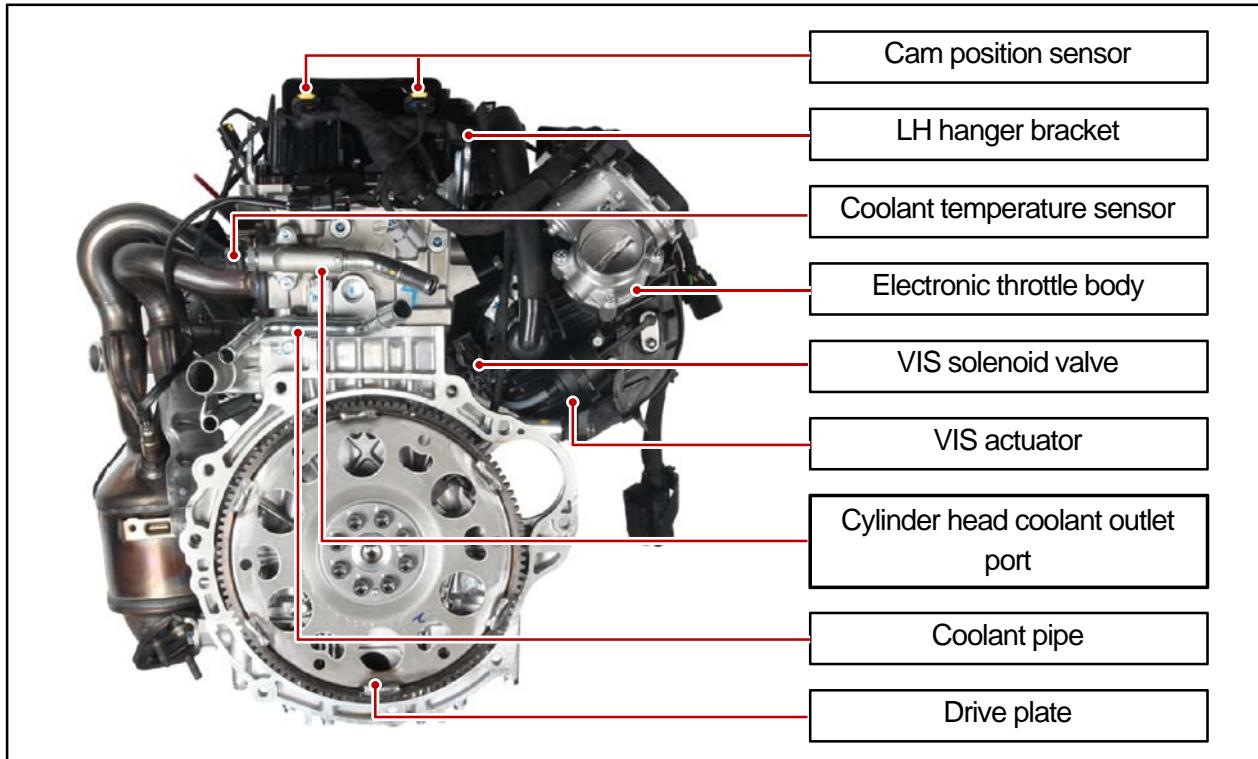


Modification basis	
Application basis	
Affected VIN	


► Left view

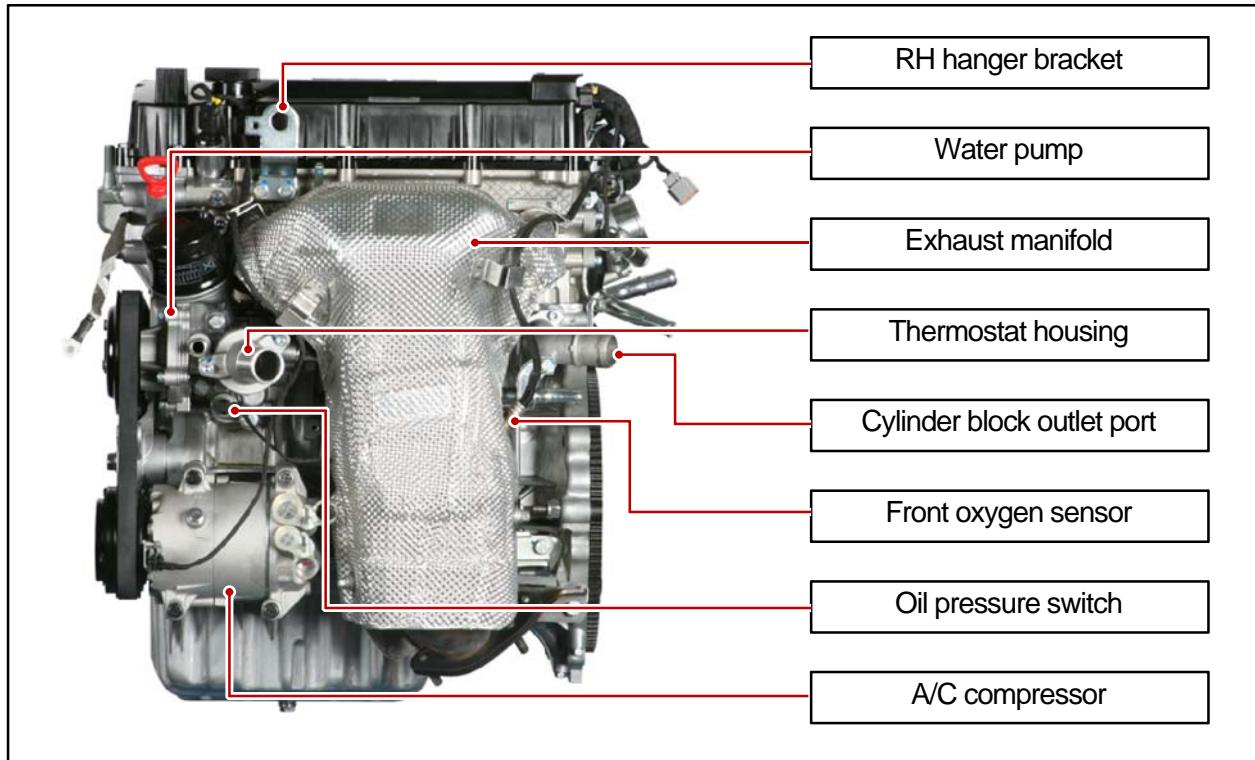

► Right view

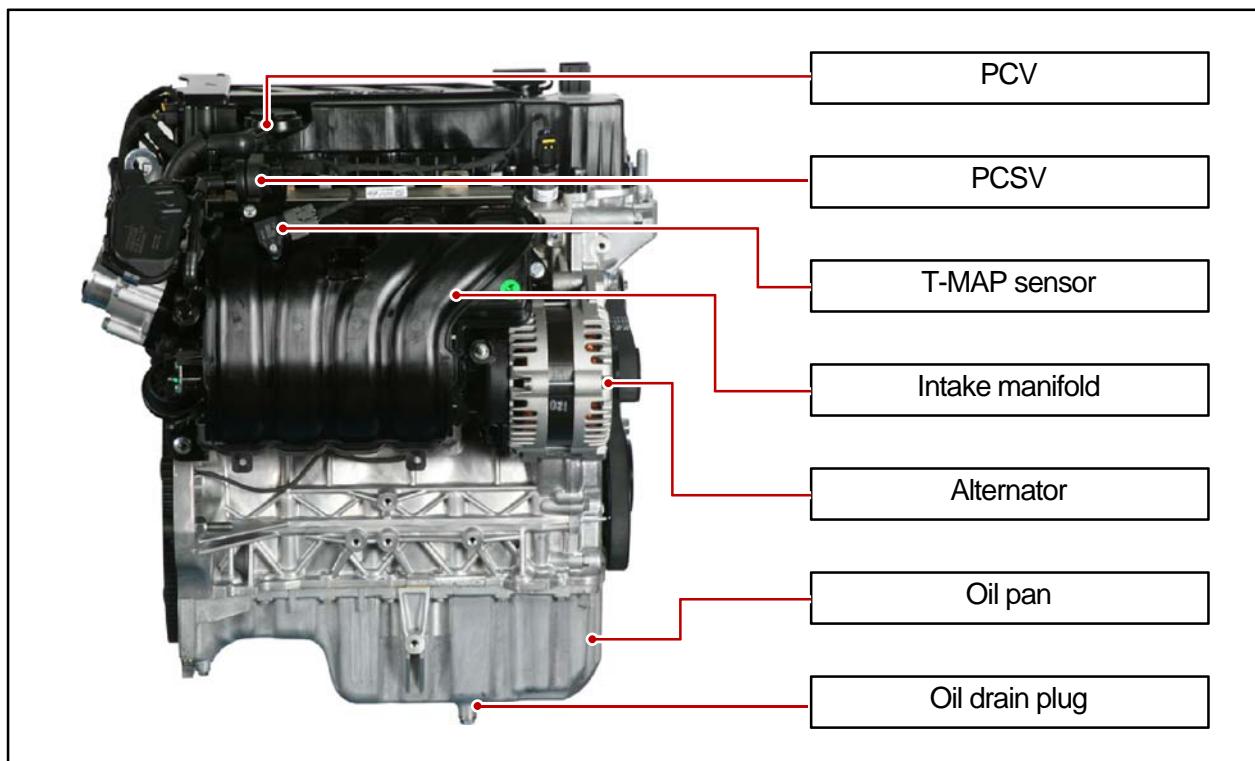

4. ENGINE COMPARTMENT LAYOUT

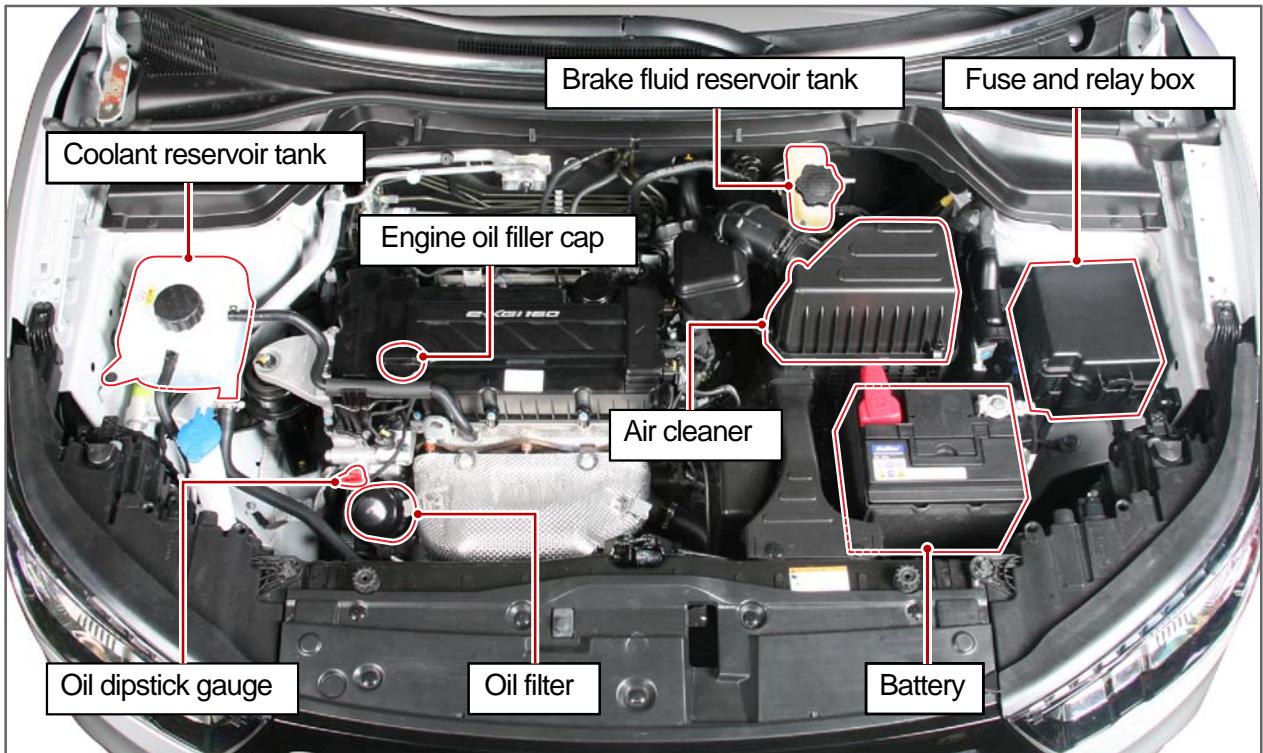

⚠ CAUTION

- When checking the engine compartment, be careful not to touch the hot components such as engine, radiator, exhaust manifold, catalytic converter, and muffler immediately after the engine has been stopped. Check the engine compartment after the engine has been cooled down sufficiently. Regularly check the engine oil level and add Ssangyong genuine engine oil, if necessary.
- Clean the oil dipstick gauge with a clean cloth to prevent any foreign material from entering.
-

⚠ WARNING

- Operating the vehicle with insufficient amount of engine oil will result in severe damage the engine. Make sure that the engine oil level is correct and add oil, if necessary.

Modification basis	
Application basis	
Affected VIN	

1) Major Check Items and Service Interval

Check item	Daily check	Weekly check	Change interval
Engine oil and oil filter	Check	-	Change check 7,500 km of driving, then change at every 15,000 km of driving or 12 months whichever comes first. Check the oil level randomly and add if necessary, Service more frequently under severe conditions Replace the oil filter when changing the engine oil.
Coolant	Check	-	Change at every 5 years or 200,000 km of driving. (Long life antifreeze)
Air cleaner element	-	Check	Clean at every 15,000 km of driving and replace at every 30,000 km of driving. Clean or service more frequently under severe conditions such as driving on a dusty road or off-road.
Fuel filter	-	-	Service at every 30,000 km of driving. Region where bad fuel is used: Change at every 50,000 km

2) Fluid Specifications And Capacity

Engine oil	Specifications	- Ssangyong genuine engine oil (ZIC SYMC 5W-30, ZIC SYMC FE 5W-20) - Approved by MB 229.51 5W30, MB 229.52 5W30, API SN / ILSAC GF-5 5W20
	Capacity	Approx. 4.0 L (4.5 L at initial fill)
Coolant	Specifications	Ssangyong genuine coolant (Long life antifreeze) (water:antifreeze = 50:50)
	Capacity	Approx. 6.5 L

NOTE


Severe conditions

- Driving at high engine rpm or high speed, Excessive idling
- Driving for more than 2 hours at constant high speed (higher than 80% of maximum speed)
- Driving on dusty roads (off-roads) or muddy roads
- Driving on salted roads (coastal road, snow-melt road)
- Driving with high load such as trailer towing, cargo loaded

Modification basis	
Application basis	
Affected VIN	

5. TIGHTENING TORQUE BY BOLT STRENGTH

Bolt	Pitch	Tightening torque(kgf.cm)					
		Standard			Limit		
		4T	7T	9T	4T	7T	9T
M3	0.5	5	9	13	7	12	17
M4	0.7	12	20	30	16	27	40
M5	0.8	24	40	57	32	53	77
M6	1.0	41	68	99	55	91	130
M8	1.25	88	160	230	130	210	310
M10	1.25	190	330	470	260	430	620
	1.5	190	310	450	250	420	600
M12	1.25	350	580	840	460	770	1,100
	1.75	330	550	790	440	730	1,000
M14	1.5	550	910	1,300	730	1,200	1,900
M16	1.5	830	1,100	2,000	1,100	1,900	2,700
M18	1.5	1,200	2,000	2,900	1,600	2,700	3,800
M20	1.5	1,700	2,800	4,000	2,200	3,700	5,300
M22	1.5	2,300	3,800	5,400	3,000	5,000	7,200
M24	1.5	2,900	4,900	7,000	3,900	6,500	9,400
	2.0	2,800	4,700	6,800	3,800	6,300	9,100

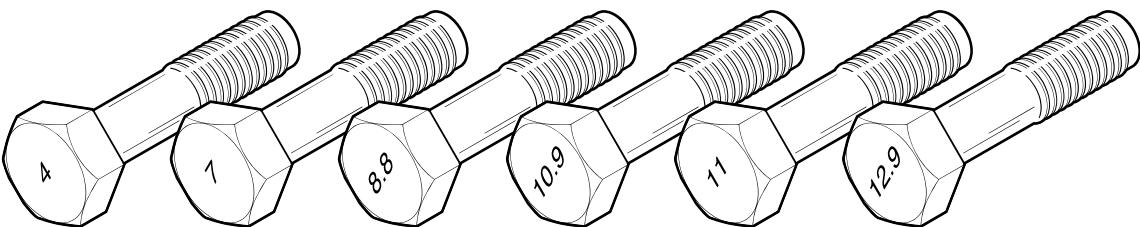

- 1) Metric bolt strength is stamped on the head of each bolt. The strength of bolt can be classified as 4T, 7T, 8.8T, 10.9T, 11T and 12.9T in general.
- 2) Observe the standard tightening torque during bolt tightening. You can determine the proper tightening torque within 15 % of standard value, if necessary. Try not to over permitted maximum tightening torque, if not required to do so.
- 3) Determine the proper tightening torque separately, if tightening with washer or packing is required. When the bolts are needed to be tightened to the below materials, follow the tightening torque specified below.
- 4) specified below.

- Aluminum alloy: Tighten to 80 % of above torque table.
- Plastics: Tighten to 20 % of above torque table.

Modification basis	
Application basis	
Affected VIN	

6. ENGINE TIGHTENING TORQUE

Components	Tool dimensions	Bolt Quantity	Specified torque (Nm)	Remarks
Belt tensioner	17 mm	1	61 ± 2.0 Nm	
Crankshaft pulley	27 mm	1	220 Nm 90°	
Engine ground cable	10 mm	2	10 ± 1.0 Nm	
Alternator	15 mm	1	61 ± 6.1 Nm	
	17 mm	1		
A/C compressor	13 mm	4	25 ± 2.5 Nm	
Water pump pulley	10 mm	3	10 ± 1.0 Nm	
Water pump	5 mm hexagon wrench	5	10 ± 1.0 Nm	
Exhaust manifold heat protector	10 mm	4	10 ± 1.0 Nm	
Exhaust manifold	12 mm	7	40 ± 5.0 Nm	Non-reusable
	13 mm	3	25 ± 2.5 Nm	
TOC coolant return pipe (vehicle with A/T)	10 mm	2	10 ± 1.0 Nm	
Coolant return pipe (vehicle with M/T)	10 mm	3	10 ± 1.0 Nm	
TOC coolant supply pipe (vehicle with A/T)	10 mm	2	10 ± 1.0 Nm	
Cylinder head outlet port	5 mm hexagon wrench	2	10 ± 1.0 Nm	
Cylinder block outlet port	5 mm hexagon wrench	2	10 ± 1.0 Nm	
Oil filter module	13 mm	1	25 ± 2.5 Nm	Bolt length: 60 mm
		1		Bolt length: 105 mm
		3		Bolt length: 40 mm
Thermostat	5 mm hexagon wrench	2	10 ± 1.0 Nm	
Electronic throttle body	10 mm	4	10 ± 1.0 Nm	
Fuel rail	13 mm	2	25 ± 2.5 Nm	
Intake manifold	13 mm	3 bolts 1 nut	25 ± 2.5 Nm	

Modification basis	
Application basis	
Affected VIN	

Components	Tool dimensions	Bolt Quantity	Specified torque (Nm)	Remarks
Knock sensor	13 mm	1	20 ± 5.0 Nm	-
OCV	8 mm	2	8 ± 1.0 Nm	
Cam position sensor	10 mm	2	10 ± 1.0 Nm	
Ignition coil	10 mm	4	10 ± 1.0 Nm	
Spark plug	16 mm	4	20 ± 2.5 Nm	
Cylinder head cover	10 mm	16	10 ± 1.0 Nm	
Cylinder head	E16	10	30 ± 3.0 Nm 90° X 2 times	Non-reusable
Camshaft sprocket	M14 (12-point bit socket)	2	110 ± 10 Nm	-
Camshaft front bearing cap	10 mm	4	10 ± 1.0 Nm	
Camshaft bearing cap	10 mm	16	10 ± 1.0 Nm	
Oil pan	10 mm	2	10 ± 1.0 Nm	Bolt length: 115 mm
		2	10 ± 1.0 Nm	Bolt length: 105 mm
		16	10 ± 1.0 Nm	Bolt length: 25 mm
	13 mm	2	25 ± 2.5 Nm	Bolt length: 80 mm
Timing gear case cover	15 mm	4	58 ± 5.8 Nm	Bolt length: 80 mm
		1	58 ± 5.8 Nm	Bolt length: 50 mm
	13 mm	1	25 ± 2.5 Nm	Bolt length: 45 mm
		9	25 ± 2.5 Nm	Bolt length: 30 mm
Timing chain tensioner	5 mm hexagon wrench	2	10 ± 1.0 Nm	-
Tensioner rail	T40	1	25 ± 2.5 Nm	
Guide rail	T40	3	25 ± 2.5 Nm	
Sliding upper rail	5 mm hexagon wrench	2	10 ± 1.0 Nm	
Baffle plate	10 mm	6	10 ± 1.0 Nm	
Oil pump chain tensioner	T40	1	25 ± 2.5 Nm	
VOP extension wiring	5 mm hexagon wrench	1	10 ± 1.0 Nm	

Modification basis	
Application basis	
Affected VIN	

Components	Tool dimensions	Bolt Quantity	Specified torque (Nm)	Remarks
Oil pump	6 mm hexagon	4	25 ± 2.5 Nm	-
Connecting rod cap	12-point socket 8 mm	8	20 ± 5.0 Nm 80° + 10°	
Crankshaft position sensor	5 mm hexagon wrench	1	5 ± 1.0 Nm	
Drive plate	T55	8	45 ± 5.0 Nm 45° ± 5°	Non-reusable
Crankshaft rear seal	10 mm	6	10 ± 1.0 Nm	-
Bed plate	E10	10	25 ± 5.0 Nm	Non-reusable
Main journal	12-point socket 13 mm	10	55 ± 5.0 Nm 100° + 5°	
starter motor	14 mm	2	45 ± 5.0 Nm	-
Oil filter	Oil filter installation/ removal cup	-	12 to 16 Nm	
Cylinder block coolant screw plug	19 mm	1	30 Nm	
Flywheel	T55	8	45 ± 5.0 Nm 90° ± 5°	Non-reusable

Modification basis	
Application basis	
Affected VIN	

7. VARIANT CODING

When any ECU including engine ECU has been replaced, the variant coding is necessary. If there is improper operation and error in a system, check the variant code first.

Variant Code	Select	Remark
Unleaded/leaded	Unleaded	Select "Unleaded".
	Leaded	
NC inhibit	No inhibit	Select "Inhibit".
	Inhibit	
MIL	MIL not illuminate	Select "MIL illuminate".
	MIL illuminate	
Tire Size	195/70R15	16 inch: Select "205/60R16". 18 inch: Select "215/45R18".
	205/60R16	
	215/45R18	
	Undefined	
Coding is completed	YES	Select "YES".
	NO	
Immobilizer & key	Non-IMMO(Non-IMMO+BCM+Conv.key)	Select the appropriate system.
	BCM(Non-IMMO+BCM+Conv.key)	
	SKM(Non-IMMO+BCM+Smat key)	
	Reserved	
Engine type	G16DF	Select "YES".
Transmission type	MT	MT: Select "MT". AT: Select "AT".
	AT	
TPMS	not equipped	Select "not equipped" or "equipped".
	equipped	
ABS/ESP	not equipped	Select "ABS" or "ESP".
	ABS	
	ESP	

Modification basis	
Application basis	
Affected VIN	

Variant Code	Select	Remark
RON correction	RON87~100	Select "RON95".
Drive Control System	No system	Select "No system" or "Cruise control".
	Cruise control	
	ACC	
	Undefined	
Vehicle speed max	180Km/h	Select "180Km/h".
	190Km/h	
	200Km/h	
	210Km/h	
Cooling fan	Relay	Select "Relay".
	PWM	
Air-conditioning	Not equipped	Select "equipped".
	Equipped	
Able signal of vehicle variant message	Not defined	Select "YES".
	NO	
	YES	
	Signal not valid	
Platform	Tivoli	Select "Tivoli".
Transfer case	2WD	Select "2WD" or "4WD".
	4WD	
Electric power steering	Short body G16DF	Select the appropriate system.
	Short body D16DTF	
	Long body G16DF	
	Long body D16DTF	
Korea/Export	Korea	Select the region.
	General export	
	EU export	

Modification basis	
Application basis	
Affected VIN	